



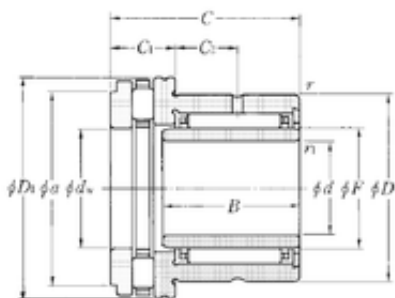

NSK bearing Trading Co., Ltd

12 mm x 24 mm x 16 mm 12 mm x 24 mm x 16 mm NTN NKXR15T2+IR12 x 15 x 16 complex bearings

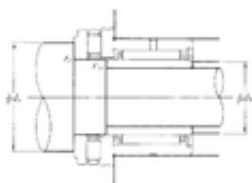

Bearing No. NKXR15T2+IR12 x 15 x 16

NKXR15T2+IR12 x 15 x 16 Bearing 2D drawings and 3D CAD models

Bore Diameter	12 mm
Outer Diameter	28 mm
d	12 mm
d1	15 mm
F	15 mm
D	24 mm
D1	28 mm
B	16 mm
C	23 mm
ra1 max.	0,3 mm
r min.	0,3 mm
r1 min.	0,3 mm
C1	9 mm
da min.	25 mm
db min	14 mm
ra max.	0,3 mm
C2	6,5 mm
Weight	0,056 Kg
Dynamic load rating radial (C)	8,25 kN
Dynamic load rating axial (C)	12,9 kN
Static load rating radial (C0)	10,2 kN
Static load rating axial (C0)	28,6 kN
(Grease) Lubrication Speed	2800 r/min



NSK bearing Trading Co., Ltd