



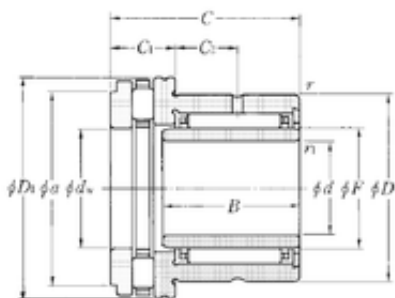

NSK bearing Trading Co., Ltd

25 mm x 42 mm x 20 mm 25 mm x 42 mm x 20 mm NTN NKXR30T2+IR25 x 30 x 20 complex bearings

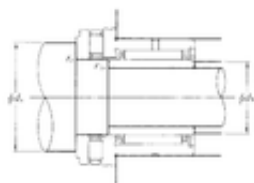

Bearing No. NKXR30T2+IR25 x 30 x 20

NKXR30T2+IR25 x 30 x 20 Bearing 2D drawings and 3D CAD models

Bore Diameter	25 mm
Outer Diameter	47 mm
d	25 mm
d1	30 mm
F	30 mm
D	42 mm
D1	47 mm
B	20 mm
C	30 mm
ra1 max.	0,3 mm
r min.	0,6 mm
r1 min.	0,3 mm
C1	11 mm
da min.	44 mm
db min	27 mm
ra max.	0,6 mm
C2	9,5 mm
Weight	0,197 Kg
Dynamic load rating radial (C)	22,3 kN
Dynamic load rating axial (C)	27,8 kN
Static load rating radial (C0)	39,5 kN
Static load rating axial (C0)	72,5 kN
(Grease) Lubrication Speed	1500 r/min



NSK bearing Trading Co., Ltd