




NSK bearing Trading Co., Ltd

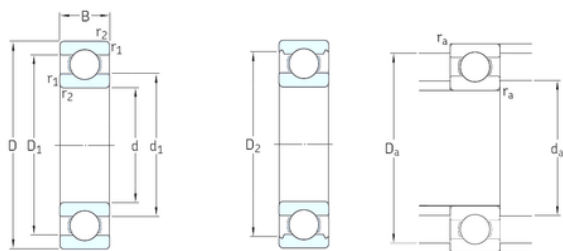

SKF Bearing 608 Z Zz -2z 2rsh 2rsl /C3 Tn9

Bearing No. 608

Size	8x22x7 mm
Bore Diameter	8 mm
Outer Diameter	22 mm
Width	7 mm
d	8 mm
D	22 mm
B	7 mm
C	7 mm
d1	12,1 mm
r1 min.	0,3 mm
r2 min.	0,3 mm
D1	17,6 mm
D2	19,2 mm
da min.	10 mm
Da max.	20 mm
rc max.	0,3 mm
Weight	0,012 Kg
Basic dynamic load rating (C)	3,45 kN
Basic static load rating (C0)	1,37 kN
Fatigue load limit (Pu)	0,057
Reference speed	75000 r/min
Limiting speed	48000 r/min
Calculation factor (f0)	12
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	SKF

608 Bearing 2D drawings and 3D CAD models



NSK bearing Trading Co., Ltd

Minimum Buy Quantity	N/A
Weight / Kilogram	0.014
EAN	7316577086945
Product Group	B00308
Enclosure	Open
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	8MM Bore; 22MM Outside Diameter; 7MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	608
Weight / LBS	0.03
Bore	0.315 Inch 8 Millimeter
Outer Race Width	0.276 Inch 7 Millimeter
Outside Diameter	0.866 Inch 22 Millimeter
bore diameter:	8 mm
static load capacity:	1.37 kN



NSK bearing Trading Co., Ltd

outside diameter:	22 mm
precision rating:	Not Rated
overall width:	7 mm
finish/coating:	Uncoated
bore type:	Round
cage material:	Steel
closure type:	Open
outer ring width:	7 mm
row type & fill slot:	Single Row Non-Fill Slot
fillet radius:	0.3 mm
snap ring included:	Without Snap Ring
maximum rpm:	48000 RPM
internal clearance:	C0
series:	60
dynamic load capacity:	3.45 kN
d_1	12.15 mm
D_2	19.2 mm
d_a min.	10 mm
D_a max.	20 mm
r_a max.	0.3 mm
Basic dynamic load rating C	3.45 kN
Basic static load rating C_0	1.37 kN
Fatigue load limit P_u	0.057 kN
Calculation factor k_r	0.025
Calculation factor f_0	12
Mass bearing	0.011 kg