




## NTN NKX50Z complex bearings

Bearing No. NKX50Z

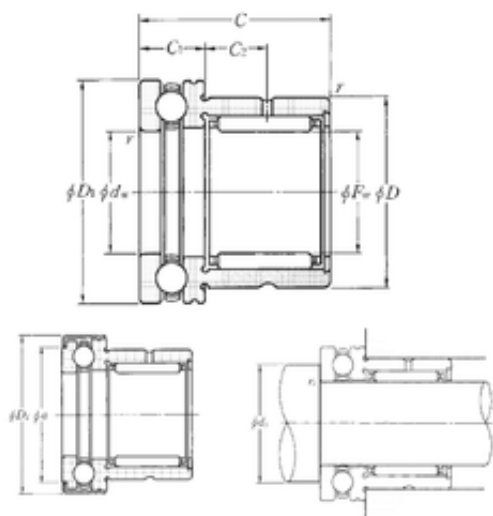

NKX50Z Bearing 2D drawings and 3D CAD models

Bore Diameter	50 mm
Outer Diameter	71,5 mm
d	50 mm
Fw	50 mm
D	62 mm
D1	70 mm
D2	71,5 mm
C	35 mm
a	65,5 mm
r min.	0,6 mm
C1	14 mm
da min.	62 mm
ra max.	0,6 mm
C2	10 mm
Weight	0,318 Kg
Dynamic load rating radial (C)	27,9 kN
Dynamic load rating axial (C)	28,8 kN
Static load rating radial (C0)	62 kN
Static load rating axial (C0)	75,5 kN
(Grease) Lubrication Speed	3100 r/min
dw	50 mm
rs min	0.6 mm
Dw	2.5 mm
Dw1	7.14 mm
Lw	16.8 mm



## NSK bearing Trading Co., Ltd

Lubrication hole on outer ring	Oui/Yes
k	3 mm
Precision class	P0
Mass	0.32 kg
Cr	27.9 kN
Ca	28.8 kN
C0r	62 kN
C0a	75.5 kN
Nlim (grease)	3,100 rpm
Nlim (oil)	4,500 rpm
Min operating temperature, Tmin	-20 ° C
Max operating temperature, Tmax	120 ° C
da min	62 mm
ras max	0.6 mm
Category	Roller Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.308
EAN	4547359126464
Product Group	B04144